


TO251-3L (IPAK), OPTION AA Tube Packing Configuration: Figure 1.0

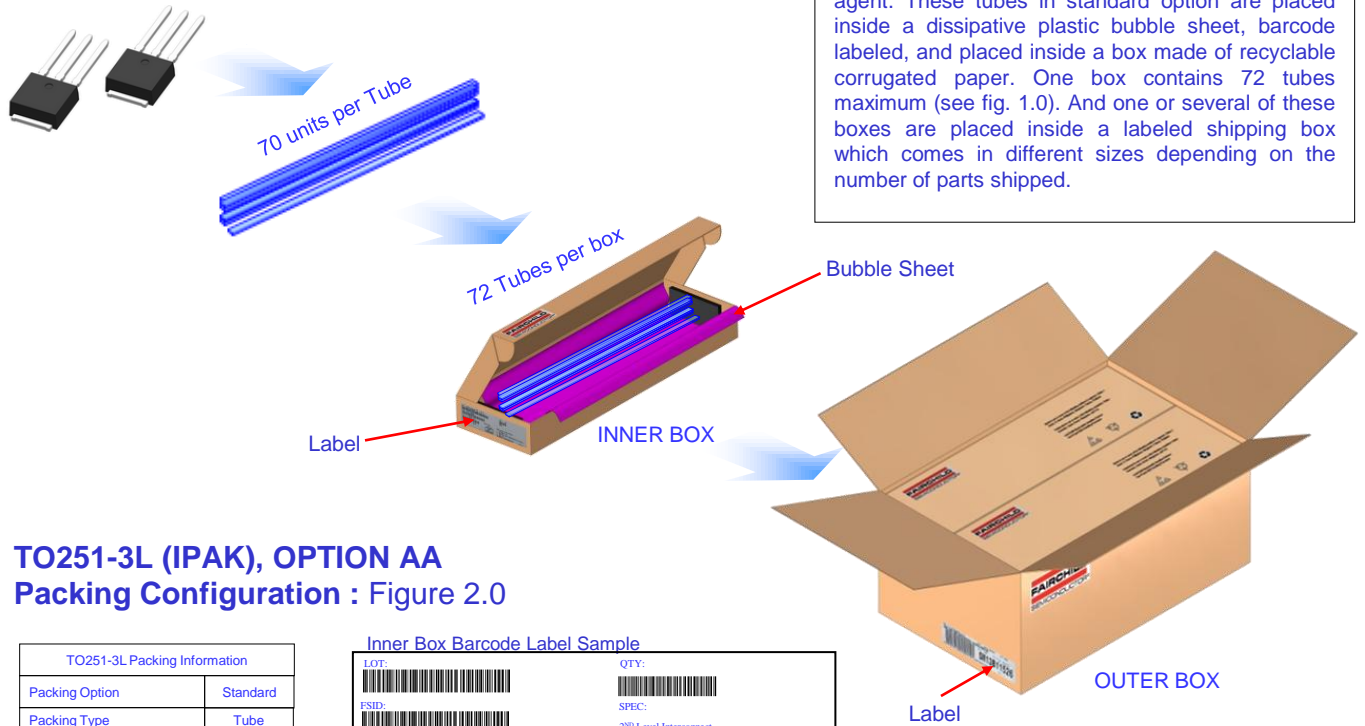

Packing Description:

TO251-3L parts are shipped normally in tube. The tube is made of PVC plastic treated with anti-static agent. These tubes in standard option are placed inside a dissipative plastic bubble sheet, barcode labeled, and placed inside a box made of recyclable corrugated paper. One box contains 72 tubes maximum (see fig. 1.0). And one or several of these boxes are placed inside a labeled shipping box which comes in different sizes depending on the number of parts shipped.


TO251-3L (IPAK), OPTION AA Packing Configuration : Figure 2.0

TO251-3L Packing Information	
Packing Option	Standard
Packing Type	Tube
Qty per Tube	70
Inner Box Dimension (mm)	524x141x63
Max qty per Inner Box	5040
Outer Box Dimension (mm)	530x305x210
Max qty per Box	30240
Weight per unit (gm)	-
Note/Comments	


Inner Box Barcode Label Sample



Outer Box Barcode Label Sample

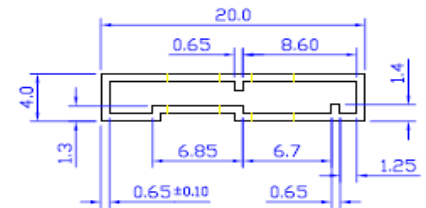

TO251-3L (IPAK), OPTION AA Tube Configuration : Figure 3.0

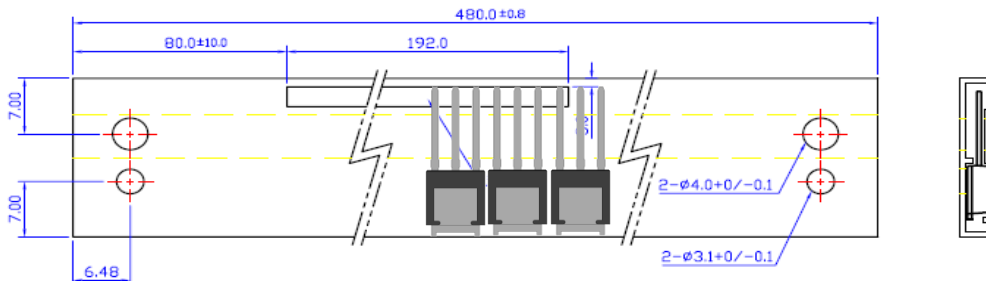

NOTES:

A : ALL DIMENSION ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

B : DRAWING FILE NAME : PKG-TO251A03REV2