

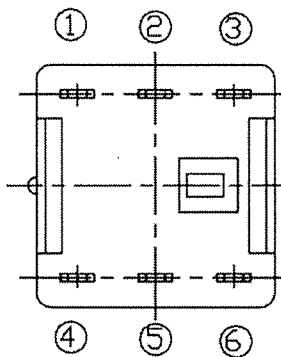
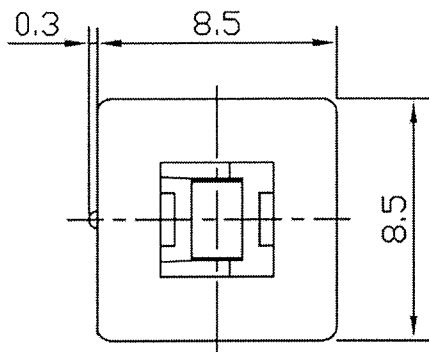
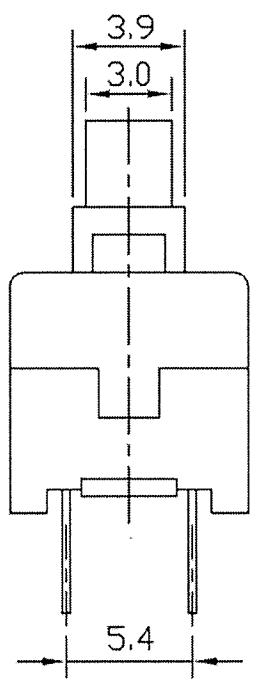


THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

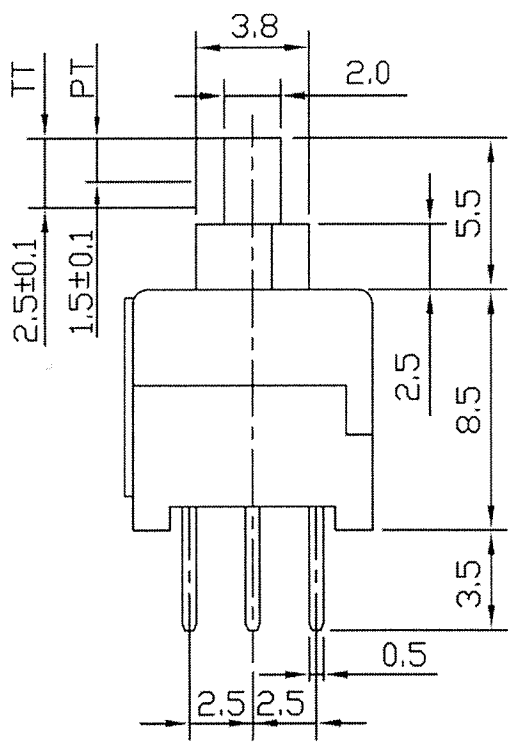


SCHEMATIC

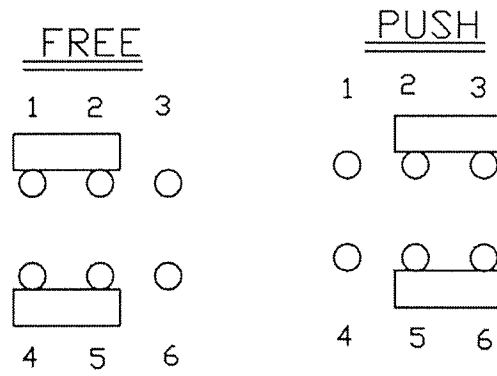

Rating	30VDC 0.3A / 16VDC 0.5A
Withstand Voltage	AC250V 1 minute
Insulation Resistance	≥ 100MΩ DC250V
Contact Resistance	≤ 50mΩ
Soldering Temp.	245±5°C 5 Sec.
Mechanical Life	100,000 cycles
Electrical Life	10,000 cycles
Operating Temp.	-25°C - + 65°C
Position Travel	1.5 ± 0.2 mm
Ambient Humidity Range	< 85%RH
Operating Force	200±80gf

NOTE: TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2(mm).

RoHS Compliant

 <b>CW INDUSTRIES</b> Southampton, Pa. 18966 Tel 215.355.7080/www.cwind.com	Date Drawn: 3-21-12	Rev. 1	Unit: mm	Checked By: <i>G. Guld</i>	1 Added Button to title. Updated Operating Temp. & removed shipping temper. 11-12-12.
	Title: <b>PUSH BUTTON SWITCH</b>		CW P/N: <b>GPBS850N</b>		