



NOTES:

1. SUGGESTED MOUNTING HOLE = $\phi.147 \pm .001$
2. MAXIMUM INSTALLATION TEMP.: 430°F

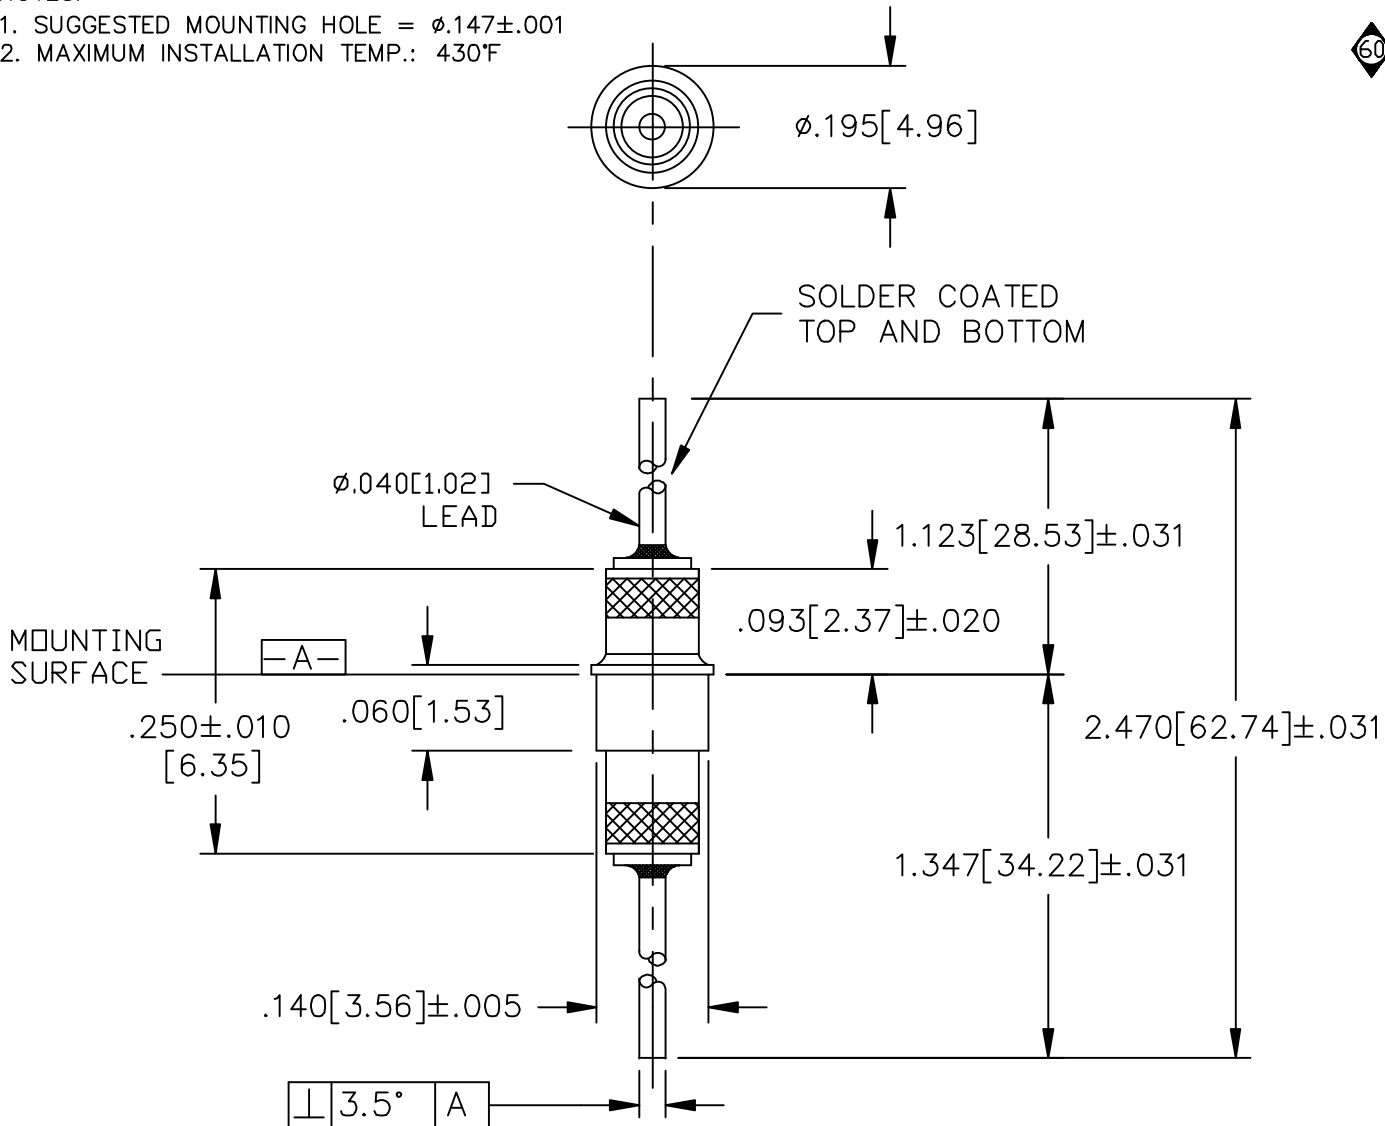

60

LEAD FINISH: SOLDER	
EYELET FINISH: SILVER	
CAPACITANCE	3000pF GMV
TEMP. RANGE	-55°C TO 125°C
CURRENT	10 AMP MAX.
WORKING VOLTAGE	85°C -- VDC MAX. 125°C 200 VDC MAX.
D.C. RESISTANCE	.01ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	
FREQ. MHz	I.L. (db)
1	-
10	10
30	25
100	45
300	65
1 GHz	65

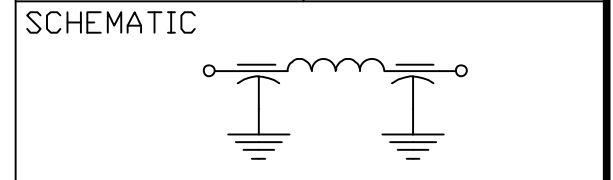

MARKING:

PART: NONE
 BAG:
 51-750-322
 DATE CODE
 QTY./BAG (200 MAX.)

	60	59	58	57	56	55	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED
	CN 63092-ENG	CN 202455	CN 202267	CN 201256	CN 189525	CN 184946 REDRAWN	CHANGE NOTICE	Fractions $\pm 1/64$
								Dec. .xx \pm
								Dec. .xxx $\pm .005$
								Angles $\pm 0^\circ 30'$
								CODE IDENT. NO. DLSP2

SPECTRUM CONTROL INC.

FAIRVIEW PENNSYLVANIA	
Dwn. KAUFFMAN	Description
Date 3-28-12	SOLDER MNT. FILTER
Engr. B. DEVINE	51-750-322
Scale NONE	