



## New Product Announcement

### AP9234L

# High-Accuracy, Single-Chip Solution For 1-Cell Lithium Battery Protection

The AP9234L is a single-chip protection solution designed for 1-cell Li+ rechargeable battery pack applications.

AP9234L incorporates high-accuracy Lion battery protection and a dual N-channel, ultra-low  $R_{SS(ON)}$  MOSFET with a common drain.

It provides rich battery protection features: overcharge voltage/current, overdischarge voltage/current and load short-circuit.

AP9234L has a built-in fixed delay time to minimize external components.

Highly-accurate detection circuits compensate the internal MOSFET  $R_{SS(ON)}$  performance to ensure extremely high overcharge/discharge current limit accuracy at both room and full temperature.

The AP9234L is available in the U-DFN2535-6 package.



## The Diodes' Advantage

### AP9234L is a high-accuracy single-chip solution for 1-cell Lithium battery protection

- **High-Voltage CMOS Process, up to 30V (between terminals)**  
Withstands extreme transients/surges voltage from adapters
- **Low Quiescent Current (3 $\mu$ A normal; 0.1 $\mu$ A in power down)**  
Minimizes discharge of battery ensuring longer battery operation
- **High-Accuracy Voltage Detection**  
Accurately and reliably detects overcharge voltage/current, overdischarge voltage/current, or load short-circuit conditions. With compensation circuit integrated and it can ensure highly accurate charge/discharge current limit range under full temperature
- **Built-in Delay Time (+25 $^{\circ}$ C), Accuracy  $\pm$ 20%**  
Saves external components, lower BOM cost
- **Selectable Power-down Mode(or auto-wake-up mode), 0V Battery Charge Mode, and Overcharge Protection Mode**  
Rich design flexibility

## Circuit Functions


- Li+ Rechargeable Battery Pack



# New Product Announcement

## AP9234L

### Typical Application Schematic

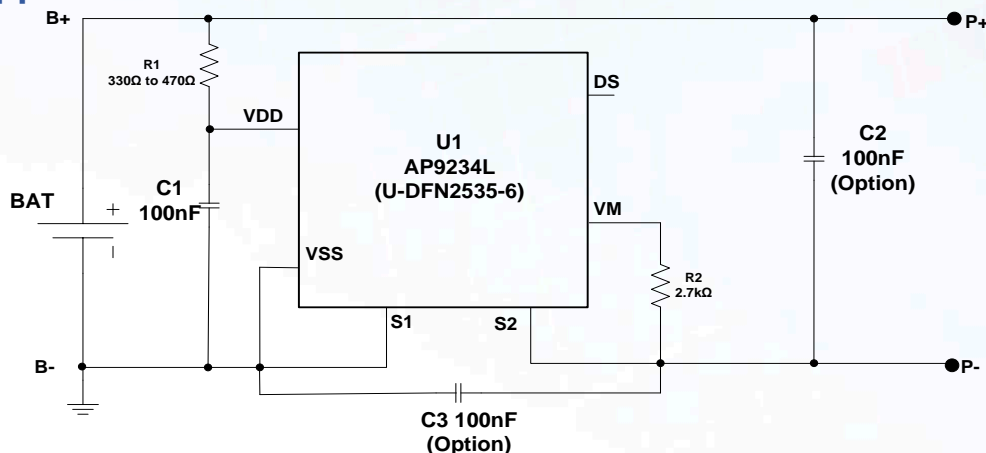

### Product Portfolio

#### Voltage Combination

Part Number	Overcharge		Overdischarge		Discharge	Load Short Detection Voltage $V_{SHORT}$	Charge Overcurrent Detection Voltage $V_{COC}$	Overvoltage	
	Detection Voltage $V_{CU}$	Release Voltage $V_{CL}$	Detection Voltage $V_{DL}$	Release Voltage $V_{DU}$	Overcurrent Detection Voltage $V_{DOC}$			Charger Detection Voltage $V_{OVCHG}$	Charger Release Voltage $V_{OVCHGR}$
AP9234LA-AO-HSB-7	4.425V	4.225V	2.500V	2.900V	0.064V	0.228V	-0.073V	8.0V	7.3V

#### Delay time Combination

Delay Time Option	Overcharge Detection Delay time ( $t_{CU}$ )	Overdischarge Detection Delay Time ( $t_{DL}$ )	Overdischarge Current Detection Delay Time ( $t_{DOC}$ )	Overcharge Current Detection Delay Time ( $t_{COC}$ )	Load Short Circuiting Detection Delay Time ( $t_{SHORT}$ )
1	1,000ms	115ms	10ms	10ms	320μs

Note: Current voltage versions are built by delay time option 1. If any other voltage versions or delay time combinations are needed, please contact local sales' office.