


SWITCH FUNCTION		
PDS: 1	PDS: 2	PDS: 3
<DN>	OFF	<DN>
2-3	OPEN	2-1

()=Momentary

- NOTES:
1. ALL DIMENSIONS IN MM
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FOR REF. ONLY
 4. RATING: 3A @120VAC or 28VDC.
1A @250VAC.
 5. FIXED TERM./MOVING CONTACT
COPPER ALLOY W/SILVER PLATING
 6. ELECTRICAL LIFE: 30,000 MAKE-AND-BREAK
CYCLES AT FULL LOAD.
 7. INSULATION RESISTANCE: 1000M OHM TYPICAL
 8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL
 9. OPERATING TEMP.: -30°C to +85°C
 10. ACTUATOR: NYLON BLACK (UL94-HB)

C	21489	19.20 WAS 19.89, 3.90 WAS 4.06	6/23/14	EBP
B	12664	REVISED NOTE 4	12/26/02	CB
A	12207	RELEASED FOR PRODUCTION	9/13/02	CB
REV.	ECN No.	DESCRIPTION	DATE	CHKD

TITLE		SCALE		DATE		DR		DWG		REV	
400AWMSP4R1BLKMIQE		2:1		9/13/02		CB		T403407		C	
E-SWITCH®											

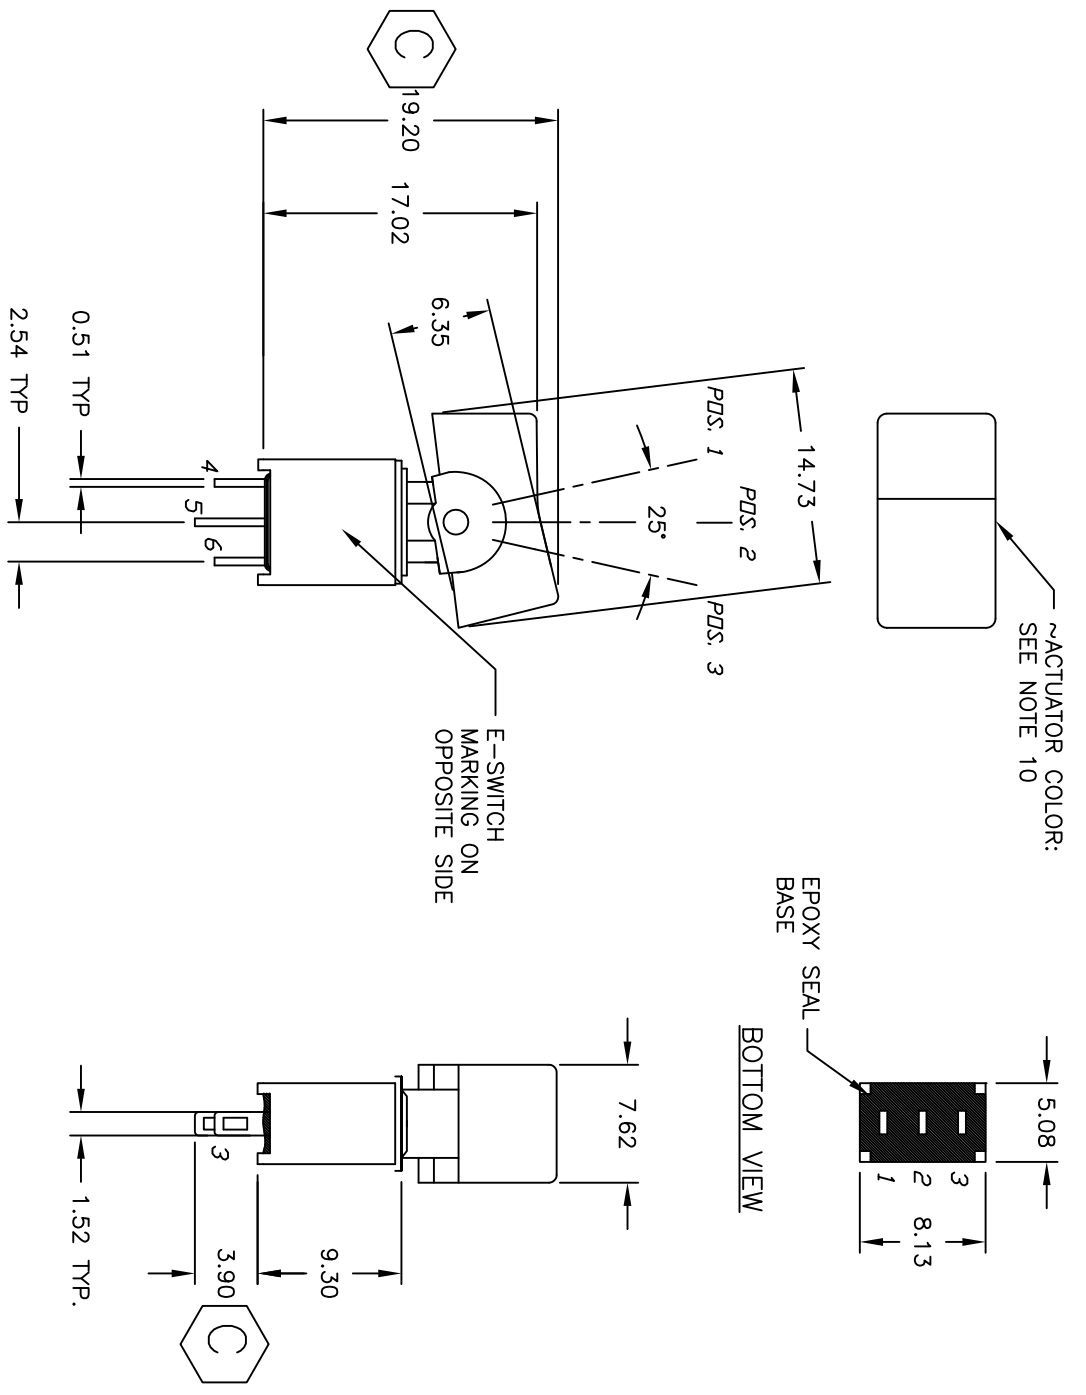

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED