





LRS200100

High Bay Lighting Kit/ Heatsink Thermal Solution

High Thermal Performance

Features

- Excellent thermal performance large heatsink surface and lightweight
- High thermal conductivity aluminum alloy
- Thermal coating Technology thermal radiation enhancement
- Fully mechanical components
- Optional E39/40 Connector


Applications

LED Bay Lighting 80-100W



The LRS series provides excellent thermal performance and design flexibility for LED lighting applications. The LRS series stamped heatsinks provide lower thermal resistance than traditional extruded, cold forged, and diecast heatsinks. High aspect ratio fin provides excellent heat transfer capability. Various material finishes are available for enhanced thermal performance.

Ordering Information

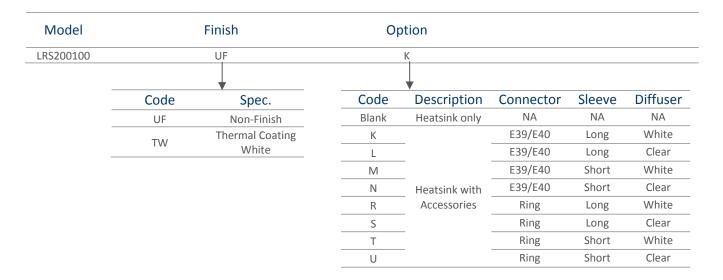



2017-05-03 DOC#xxxx Rev. B www.ctscorp.com Page 1 of 3



General


RoHS	Lead-Free. Fully compliant to RoHS Directive 2011/65/EU
Packaging:	Box
Storage Temperature:	-40°C to +150°C

Performance & Mechanical

Part Number	*Heat Dissipation	Dimension (mm) D x H	Fin Surface Area (cm²)	Weight (kg)	Kit Solution
LRS200100TW	100W	198 x 100	4007	0.7	
LRS200100TWK	100W	203 x 332	4007	1.3	Diffuser, Housing, Connector
LRS200100UF	90W	198 x 100	4007	0.7	
LRS200100UFK	90W	203 x 332	4007	1.3	Diffuser, Housing, Connector

^{*}Heat Dissipation and Thermal Resistance are based on using discrete LEDs and should be considered for reference only. Actual results may vary due to the LED configuration, the finish chosen, and the environmental conditions.

Mechanical Specifications

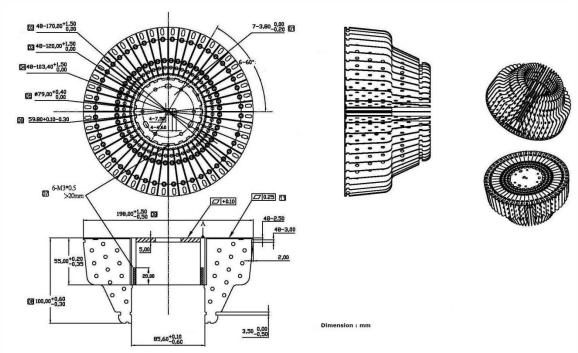



Mechanical Specifications

