

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
 FREEPORT, MICHIGAN
 FED. MFR. CODE 91929

SWITCH - BASIC

CATALOG LISTING
YA-2RB-A2


ADJ6000

CATALOG LISTING
YA-2RB-A2
 PAGE 1 OF 1
M
 DRAWING NUMBER

ISSUE 10
 RELEASE NO.

REVISIONS	CHECK	DATE
A CO 9600		17 FEB 06
B CO34310		20 DEC 78
C CO-73287-J		22 NOV 93
D CO-77588		29 MAR 94
E CO93346		
F CO-95750-B		3 APR 00
H 0000713		
J 0018388		17 FEB 06

RASTER DRAWN
 1 Y O 2 MAY 60
 GCH 9 MAY 60

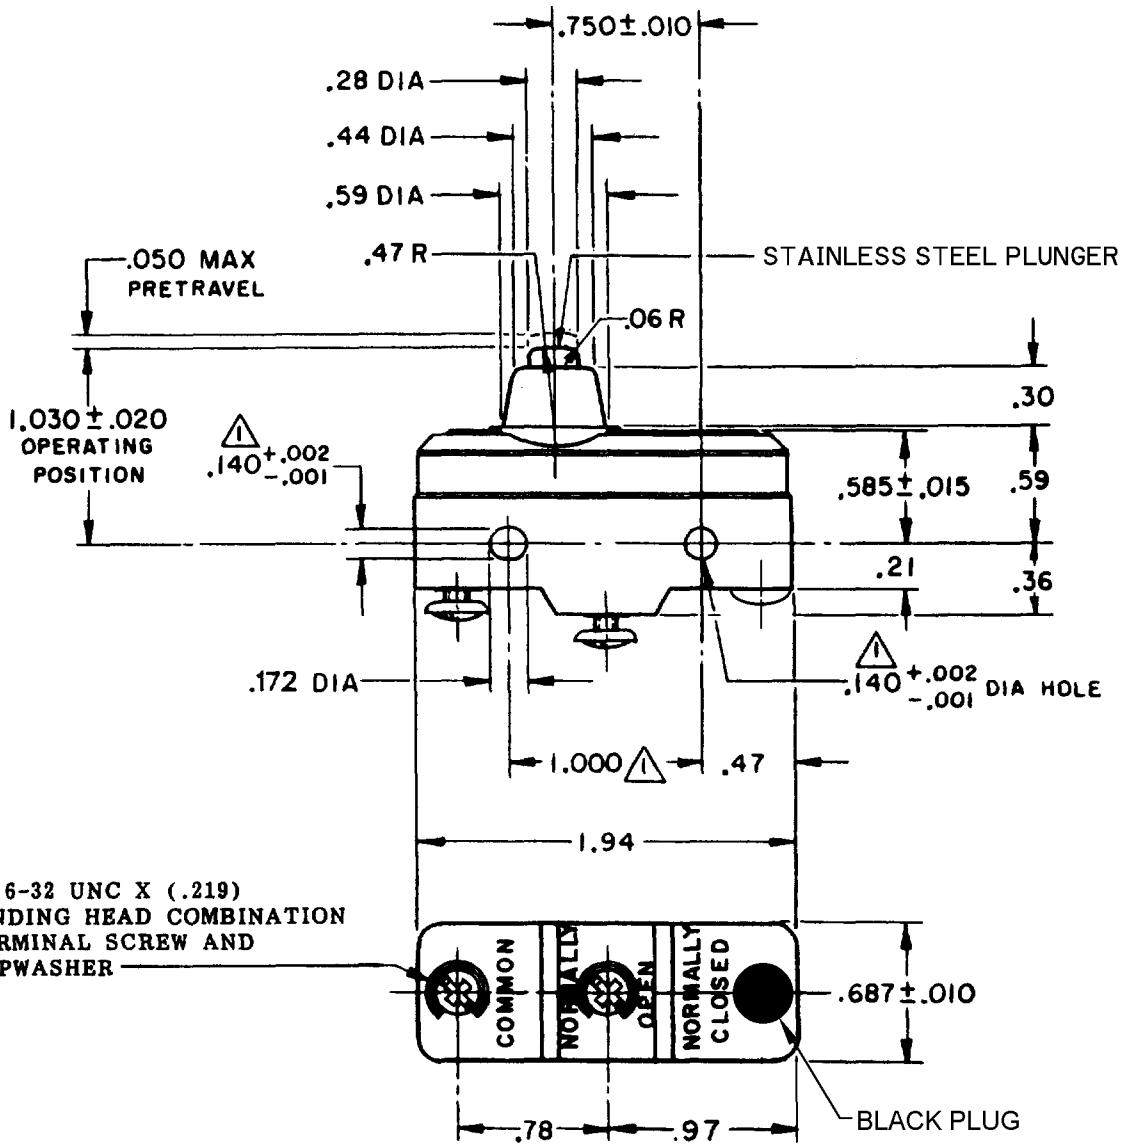

3X 6-32 UNC X (.219)
 BINDING HEAD COMBINATION
 TERMINAL SCREW AND
 CUPWASHER

NOTE
 ▲ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
 OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE ----- 14-22 OZ	CONTACT ARRANGEMENT S P N O	DO NOT SCALE PRINT
RELEASE FORCE ----- 10 OZ MIN	L23 20A - 125, 250 OR 480 VAC 10A - 125 VAC "L" 1HP - 125 VAC, 2HP - 250 VAC 1/2A - 125 VDC, 1/4A - 250 VDC	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:
DIFFERENTIAL TRAVEL -- .002-.0075	L288 L308 L315	ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±
OVERTRAVEL ----- .094 MIN	20(3)A 250V ~ T85 5E4	WEIGHT .064 LB