
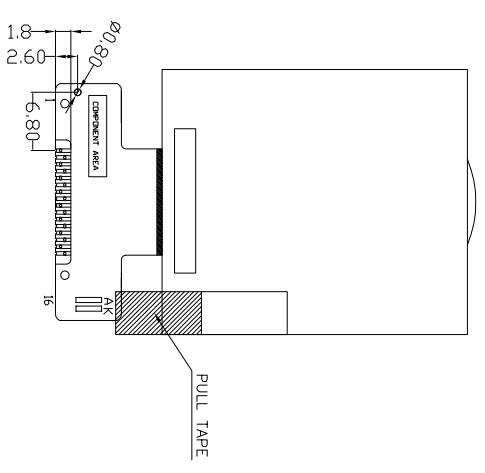
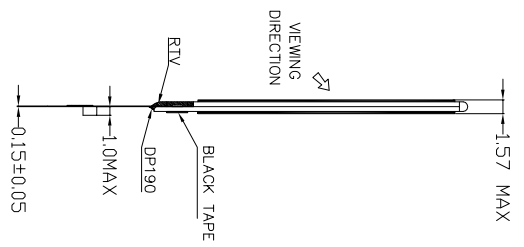


The information contained in this document is proprietary to VARRITRONIX LTD. and shall be protected from any reproduction in part or as a whole without Varritronix's written approval.

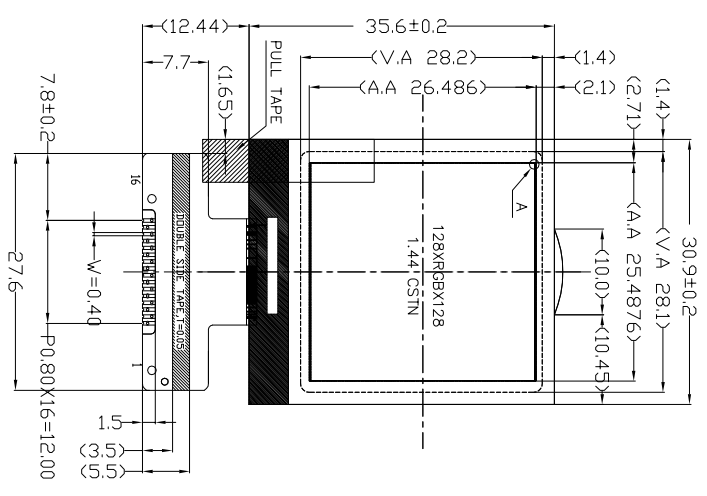

PINS ASSIGNMENT:

1	2	3	4	5	6	7	8	9
GND	GND	NC	GND	VDD	RSTB	RS	SCL	SDI
10	11	12	13	14	15	16		
CS	GND	VDD	LEDA	LEDK	GND	GND		

NOTES:

- ◇ : SPECIAL CHARACTERISTIC
- + : SAFETY CHARACTERISTIC
- ∇ : CRITICAL DIMENSION
- (...): REFERENCE DIMENSION

DETAIL A
(FOR REFERENCE ONLY)

DISPLA TYPE	CSTN65K
DISPLAY RESOLUTION	128xRGBx128
VIEWING ANGLE	6° CLOCK
MUX RATIO & BIAS	1/128 DUTY
LCD CONTROLLER/DRIVER	S6B3306
LOGIC VOLTAGE	~2.8V
LCD DRIVING VOLTAGE	~14.0V
OPERATING TEMPERATURE	-20°C TO +70°C
STORAGE TEMPERATURE	-30°C TO +80°C

TITLE: SPECIFICATION OF MODULE	
PROJECT NO.: C0G-C144MVG1-03F	
CUSTOMER NO.:	IN
TOLERANCE UNLESS OTHERWISE SPECIFIED:	XX ±0.3 XXX ±0.1
DIMENSIONS IN MM	
MATERIAL: N/A	FINISH: N/A
SCALE: 3D NOT DN SCALE	OVERALL THK: N/A
THIRD ANGLE PROJECTION	
DRAWN:	RAIN PAN
CHECKED:	ZHANG RICHIE
APPROVED:	ZHANG REDSUN
ITEM NO.: C0G-C144MVG1-03F	
DESCRIPTION: C0G-C144MVG1-03F	
FILE NO.: C0G-C144MVG1-03F	REV: 0
SHEET 1	OF 1

