



1.85 [0.073]


0.35 [0.014]


Ø0.80 [Ø0.031]



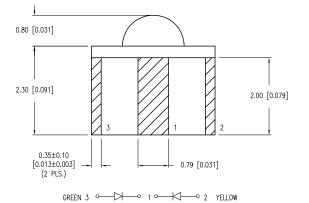

1.40 [0.055]



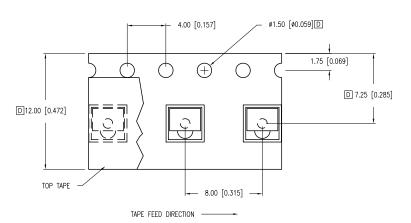

PART NUMBER	SMF-2432GYC-TR	REV.	D
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
01.15.07	E.C.N. #11148.		Α
08.09.08	E.C.N. #11530.		В
11.06.08	E.C.N. #11540.		С
10.21.13	E.C.N. #11882.		D


ELECTRO-OPTICAL CHARA	CTERIST	TICS T _A =25°C	$I_f = 20 \text{mA}$		
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		565 (GREEN)		nm	
		585 (YELLOW)		nm	
FORWARD VOLTAGE (G/Y)		2.2/2.1	2.6/2.5	V_f	
REVERSE VOLTAGE	5.0			V_r	I _r =100uA
AXIAL INTENSITY (G/Y)		4/3		mcd	I _f =20mA
VIEWING ANGLE		90		2x theta	
EMITTED COLOR:	GREEN	N/YELLOW			
EPOXY LENS FINISH:	WATER	R CLEAR LENS			

LIMITS OF SAFE OPERATION AT 25°C					
PARAMETER	MAX	UNITS			
PEAK FORWARD CURRENT*	150	mA			
STEADY CURRENT (G/Y)	25/30	mA			
POWER DISSIPATION (G/Y)	85/80	mW			
DERATE FROM 25°C	-1.6	mW/*C			
OPERATING TEMP.	-20 TO +85	*C			
STORAGE TEMP.	-30 TO +85	*C			
SOLDERING TEMP.	+260	*C			
* t<10uS					

NOTES:

B 1. 500 PIECES PER REEL.

C LEAD FREE REFLOW PROFILE



TOTAL TIME ABOVE 220°C IS 60 SECONDS MAX.

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MINI= +DECIMAL PRECISION MAX.= +0.00 (±0.001), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MINI= +DECIMAL PRECISION MAX.= +0.00 (±0.002), X.XX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.003). MINI= +DECIMAL PRECISION MAX.= +0.00 (±0.002), X.XX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD SIZE=±0.05 (±0.003). MINI= +DECIMAL PRECISION MAX.= +0.00 (±0.002), X.XX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD SIZE=±0.05 (±0.003). MINI= +DECIMAL PRECISION MAX.= +0.00 (±0.002), X.XX=±0.05 (±0.003). MINI= +DECIMAL PRECISION MAX.= +0.00 (±0.003). MINI= +DECIMAL PRECISI LINICONITROLLED DOCLIMENT



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 FAX: +1.847.359.6538

WEB: WWW.LUMEX.COM

BICOLOR 565nm GREEN/585nm YELLOW LED, Ø1.6mm RIGHT ANGLE SURFACE MNT LED, WATER CLEAR LENS, CO

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONDEDENTAL INFORMATION

CONTEDENTAL INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN HOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

ECISION ONCONTROLLED DOCOMENT						
Ö.	DATE:	04.06.05	DRAWN BY:	JC		
	PAGE:	1 OF 1	CHKD BY:	_		
	SCALE:	N/A	APRVD BY:	JD		
	UNIT:	mm [INCH]	Po			