

CLLRH SERIES

**SURFACE MOUNT
SILICON GENERAL PURPOSE
RECTIFIER
0.5 AMP, 200 THRU 600 VOLTS**



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CLLRH Series 0.5 amp leadless glass silicon rectifier is a high quality, well constructed, highly reliable component designed for use in all types of commercial, industrial, entertainment, computer and automotive applications where space is critical.

FEATURES:

- High Current Density
- High Reliability
- Special Selections Available
- Robust Glass Construction
- Superior Lot to Lot Consistency

**SOD-80 CASE****MARKING: CATHODE BAND**

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$ unless otherwise noted)	SYMBOL	CLLRH	CLLRH	CLLRH	UNITS
		-02	-04	-06	
Peak Repetitive Reverse Voltage	V_{RRM}	200	400	600	V
DC Blocking Voltage	V_R	200	400	600	V
RMS Reverse Voltage	$V_{R(RMS)}$	140	280	420	V
Average Forward Current ($T_L=80^\circ\text{C}$)	I_O		0.5		A
Peak Forward Surge Current (Non-Repetitive, 8.3ms surge)	I_{FSM}		10		A
Operating and Storage Junction Temperature	T_J, T_{stg}		-65 to +175		$^\circ\text{C}$


ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
I_R	V_R =Rated V_{RRM}		200	nA
I_R	V_R =Rated V_{RRM} , $T_A=150^\circ\text{C}$		25	μA
V_F	$I_F=500\text{mA}$		1.1	V
C_J	$V_R=4.0\text{V}$, $f=1.0\text{MHz}$		10	pF

CLLRH SERIES
 SURFACE MOUNT
 SILICON GENERAL PURPOSE
 RECTIFIER
 0.5 AMP, 200 THRU 600 VOLTS



SOD-80 CASE - MECHANICAL OUTLINE

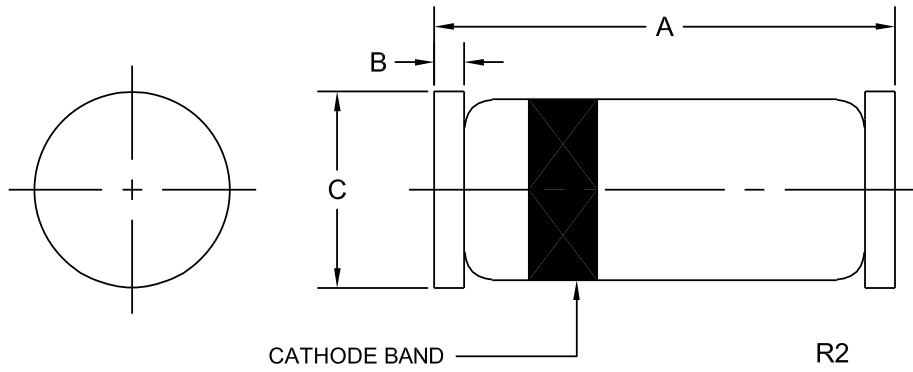

MARKING: CATHODE BAND

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.130	0.146	3.30	3.71
B	0.014		0.35	
C (DIA)	0.049	0.067	1.25	1.70

SOD-80 (REV:R2)

R4 (8-January 2010)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms