

EMC filter - NEF 1- 6 - 2783082

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Mains interference filter, with universal foot for mounting on NS 32 and NS 35/7.5, nominal current: 6 A

Why buy this product

- For single-phase circuits
- DIN rail module



Key Commercial Data

Packing unit	1 STK
GTIN	 4 017918 069803
Weight per Piece (excluding packing)	181.32 g
Custom tariff number	85363010
Country of origin	Germany

Technical data

Dimensions

Height	79.4 mm
Width	40 mm
Depth	84.1 mm

Ambient conditions

Ambient temperature (operation)	-25 °C ... 100 °C (HMF)
---------------------------------	-------------------------

General

Housing material	PA
------------------	----

EMC filter - NEF 1- 6 - 2783082

Technical data

General


Flammability rating according to UL 94	V-2
Color	black
Standards for clearances and creepage distances	IEC 60664-1
	VDE 0110-1
Type	Rail-mountable module, one-piece
Mounting type	DIN rail: 35 mm
Number of positions	2
Direction of action	1L-N & N-PE

Protective circuit, filter


Discharge resistance	1 M Ω
----------------------	--------------

Drawings


Dimensional drawing

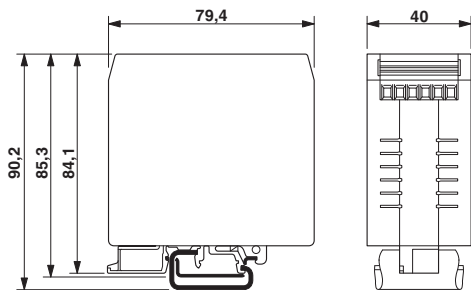

Diagram

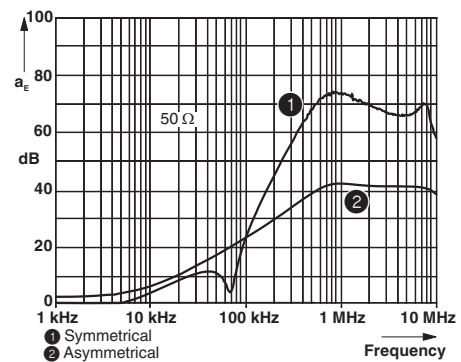

Circuit diagram

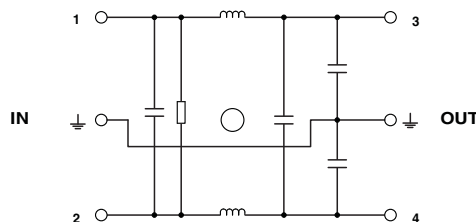

Classifications

eCl@ss

eCl@ss 4.0	27140201
------------	----------

EMC filter - NEF 1- 6 - 2783082

Classifications

eCl@ss

eCl@ss 4.1	27130801
eCl@ss 5.0	27130801
eCl@ss 5.1	27130801
eCl@ss 6.0	27130806
eCl@ss 7.0	27130806
eCl@ss 8.0	27130806
eCl@ss 9.0	27130806

ETIM

ETIM 2.0	EC000942
ETIM 3.0	EC000942
ETIM 4.0	EC000942
ETIM 5.0	EC000942

UNSPSC

UNSPSC 6.01	30212010
UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620

Approvals

Approvals

Approvals

VDE Zeichengenehmigung / GL / GL-SW / EAC / EAC / GL


Ex Approvals

Approvals submitted

Approval details

EMC filter - NEF 1- 6 - 2783082

Approvals

VDE Zeichengenehmigung 	
mm ² /AWG/kcmil	2.5
Nominal current I _N	6 A
Nominal voltage U _N	250 V

GL

GL-SW

EAC

EAC

GL