
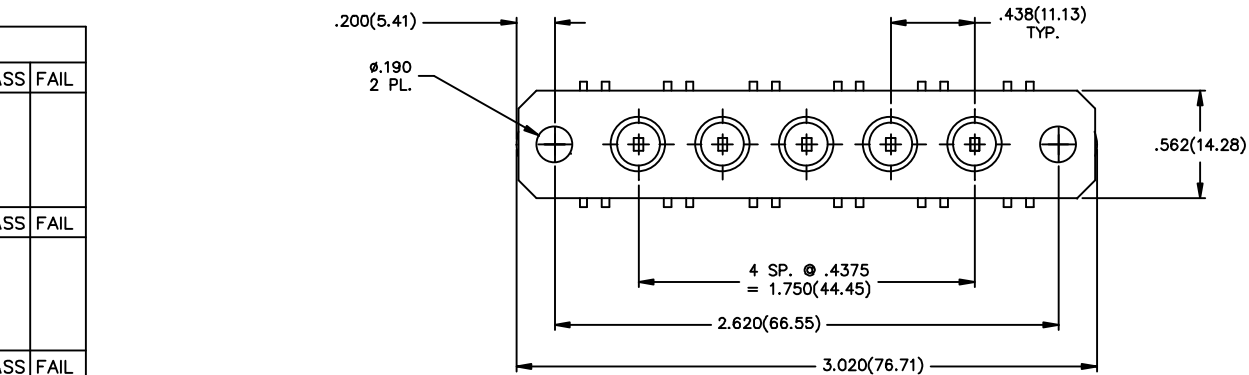



RECOMMENDED CUTOUT



MOUNTING HOLES AS REQUIRED

NOTES:

- 1) VOLTAGE: 100 VDC.
- 2) CURRENT: 20 AMPS.
- 3) OPERATING TEMPERATURE: -55°C TO +105°C.
- 4) MATERIAL: BLACK THERMOPLASTIC OR EQUIV.
- 5) SCREW TYPE: #6-32 PHILSLOT HD.
- 6) MARKING: 4 PT. CHARACTERS, WHITE INK.
- 7) CAPACITANCE: 2500pF MIN./ 5200pF MAX.
- 8) GROUND PLANE IS TO BE FLAT WITHIN .012".
- 9) SHIPPING TRAY LABEL MARKING:
 SCI 52-160-005-A DATE CODE
 100V, 20A, 12-22AWG
 UL & CSA LOGOS

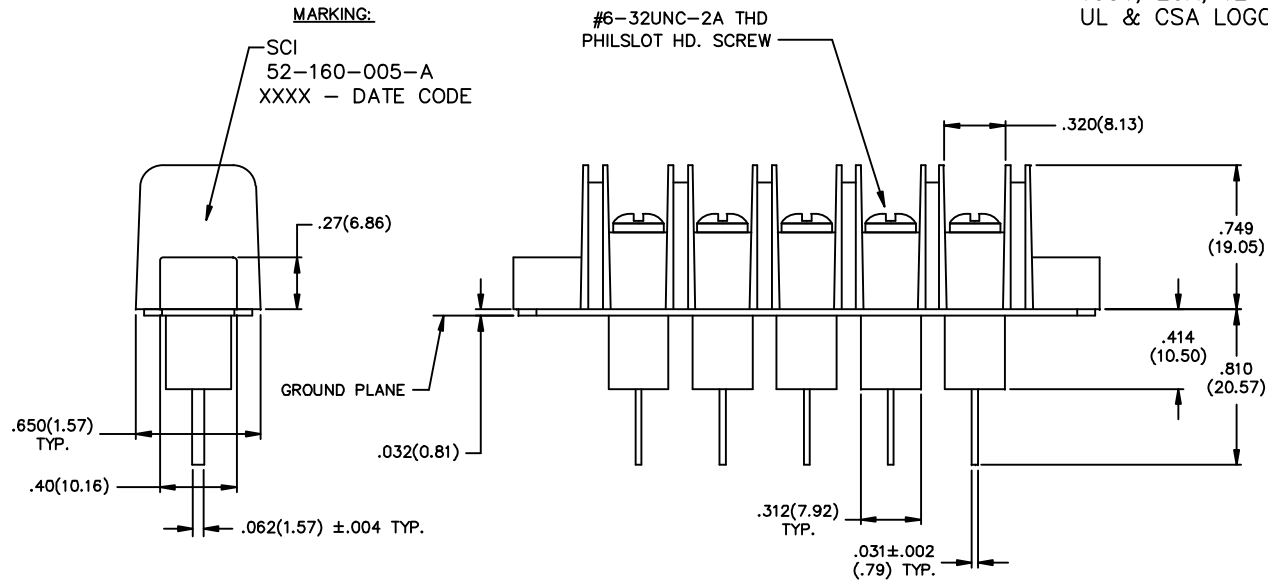

TEST SEQUENCE				
STEP 0400	94-4033-00	VISUAL/MECH	PASS	FAIL
PER IT 38-0468 INSPECT DIMENSIONS AND WORKMANSHIP. PER MIL-STD-105, LEVEL II, 1%AQL COMMENTS: 100%		OPER:		
STEP 0100	94-1002-00	CAP./D.F.	PASS	FAIL
PER IT 38-0245 CAP: 2500pF TO 5200pF DF: <4% MAX COMMENTS: 100%		OPER:		
STEP 0200	94-2005-00	DWV	PASS	FAIL
PER IT 38-0245 DWV: 2000 VDC 25°C 1 MINUTE MINIMUM COMMENTS: 100%		OPER:		
STEP 0300	94-2015-00	I.R.	PASS	FAIL
PER IT 38-0245 IR: 100VDC, 1000 Mohms MIN. 2 MINUTES MAX. COMMENTS: 100%		OPER:		

											UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES/mm. DO NOT SCALE.	TOLERANCES UNLESS OTHERWISE SPECIFIED Fractions ± 1/64 Dec. .xxx ± .03 Dec. .xxx ± .020 Angles ± 0° 30'	 FAIRVIEW PENNSYLVANIA SPECTRUM CONTROL INC. Dwn. KAUFFMAN Date 3-06-09 Aprd _____ Sheet 1 of 1	Description FILTER TERMINAL BLOCK
											 THIRD ANGLE PROJECTION	CODE IDENT. NO. QLSP2		52-160-005-A